

## Q2BQ9070C00FLAZ

Huawei® Compatible 100GBase-ZR4 Lite BX QSFP28 Transceiver (SMF, 1310.19nmTx/1272.55nmRx, 70km, LC, DOM)

### Product Description

This Huawei® Compatible QSFP28 transceiver provides 100GBase-BX ZR4L throughput up to 70km over single-mode fiber (SMF) using a wavelength of 1310.19nmTx/1272.55nmRx via an LC connector. This bidirectional unit must be used with another transceiver or network appliance of complimenting wavelengths. It is guaranteed to be 100% compatible with the equivalent Huawei® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

Skylane's transceivers are RoHS compliant and lead-free.

### Features:

- Compliant with QSFP28 MSA
- Supports 103.1Gbps Aggregate Bit Rate
- Hot Pluggable
- Single 3.3V Power Supply
- Cooled 4x25Gbps LAN WDM Transmitter TOSA, Receiver ROSA
- Up to 70km Reach for G.652 SMF
- Single LC Receptacle
- Maximum Power Consumption: 5.0W
- RoHS Compliant and Lead-Free
- Operating Temperature: 0 to 70 Celsius



### Applications:

- 100GBase Ethernet
- Datacenter

---

*For your product safety, please read the following information carefully before any manipulation of the transceiver:*



#### **ESD**

*This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.*



#### **LASER SAFETY**

*This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).*

*The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.*

---

## Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Storage Temperature	Tstg	-40		85	°C	
Operating Case Temperature	Tc	0		70	°C	
Relative Humidity	RH	0		90	%	
Supply Voltage	Vcc	-0.5		3.6	V	
Power Consumption	P			5.0	W	
Data Rate Per Lane	Gbps		25.78125			
Signaling Speed Accuracy		-100		100	ppm	

## Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	Vcc	3.135	3.3	3.465	V	
Power Supply Current	Icc	mA		1443	mA	
Sustained Peak Current	Isp	mA		1650	mA	
Instantaneous Peak Current	Iip			2000		
Power Dissipation	PW			5.0	W	
Low Power Dissipation	P <sub>DISS</sub>			1.5	W	
<b>Transmitter</b>						
Differential Voltage Pk-Pk				900	mV	
Common-Mode Noise (RMS)				17.5	mV	
Eye Height		95			mV	
Eye Width		0.46			UI	
Differential Termination Mismatch				10	%	
Transition Time		10			ps	20-80%
Common-Mode Voltage		-0.3		2.8	V	
<b>Receiver</b>						
Differential Voltage Pk-Pk				900	mV	
Common-Mode Noise (RMS)				17.5	mV	
Eye Height		228			mV	
Eye Width		0.57			UI	
Differential Termination Mismatch				10	%	
Transition Time		9.5			ps	20-80%
Vertical Eye Closure	VEC			5.5	dB	
<b>3.3V LVTTTL</b>						
Input High Voltage	VIH	2.0		Vcc+0.3	V	

Input Low Voltage	VIL	-0.3		0.8	V	
Input Leakage Current	IIN	-10		+10	uA	
Output High Voltage (IOH=100uA)	VOH	Vcc-0.5		Vcc+0.3	V	
Output Low Voltage (IOL=100uA)	VOL	0		0.4	V	
<b>3.3V LVCMOS</b>						
Input High Voltage	VIH	Vcc*0.7		Vcc+0.5	V	
Input Low Voltage	VIL	-0.3		Vcc*0.3	V	
Output High Voltage (IOH=100uA)	VOH	Vcc-0.5		Vcc+0.3	VOH	
Output Low Voltage (IOL=100uA)	VOL	0		0.4	VOL	
I/O Pin Capacitance	Ci			14	Ci	

### Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
<b>Transmitter</b>						
Center Wavelength	$\lambda_C$	1294.53	1295.56	1296.59	nm	
		1299.02	1300.05	1301.09		
		1303.54	1304.58	1305.63		
		1308.09	1309.14	1310.19		
Side-Mode Suppression Ratio (Minimum)	SMSR	30				
Total Average Launch Power	Pt			13	dBm	
Average Launch Power Per Lane	Pa	1.0		7.0	dBm	1
Optical Modulation Amplitude Per Lane	OMA	3		8.8	dBm	2
Difference in Launch Power Between Any Two Lanes (OMA) (Maximum)				3.6	dB	
Average Launch Power of Off Transmitter Per Lane	Poff			-30	dBm	
Extinction Ratio	ER	6			dB	
Optical Return Loss Tolerance				20	dB	
Transmitter Reflectance				12	dB	3
Eye Diagram			$\geq 10$			
Eye Mask Margin		{0.25, 0.4, 0.45, 0.25, 0.28, 0.4}				4
<b>Receiver</b>						
Center Wavelength	$\lambda_C$	1272.55	1273.55	1274.54	nm	
		1276.89	1277.89	1278.89		
		1281.25	1282.26	1283.27		
		1285.65	1286.66	1287.68		
Damage Threshold	Pmax	5.5			dBm	5

Average Receive Power Per Lane	Pin	-26		-5		6
Receive Power on OMA Per Lane	PinOMA			-3.5	dBm	
Receiver Reflectance	dB			-26		
Receiver Sensitivity for Each Lane (100GbE) at BER= $5 \times 10^{-5}$ BER CD=[-356/66] ps/nm	S			-24	dBm	
LOS Hysteresis		0.5		5	dB	

**Notes:**

1. Average launch power, per lane (minimum), is informative and not the principal indicator of signal strength. A transmitter with launch power below this value cannot be compliant; however, a value above this does not ensure compliance.
2. Even if the TDP<1dB, the OMA (minimum) must exceed this value.
3. Transmitter reflectance is defined looking into the transmitter.
4. Eye mask hit ratio is  $5E^{-5}$ .
5. The receiver shall be able to tolerate, without damage, continuous exposure to an optical input signal having this average power level.
6. Average receive power, each lane (minimum), is informative and not the principal indicator of signal strength. A received power below this value cannot be compliant; however, a value above this does not ensure compliance.
7. Receiver sensitivity (OMA), per lane (maximum) at  $5 \times 10^{-5}$  BER, is a normative specification.

## Pin Descriptions


Pin	Symbol	Name/Description	Notes
1	GND	Module Ground.	1
2	Tx2-	Transmitter Inverted Data Input.	
3	Tx2+	Transmitter Non-Inverted Data Input.	
4	GND	Module Ground.	1
5	Tx4-	Transmitter Inverted Data Input.	
6	Tx4+	Transmitter Non-Inverted Data Input.	
7	GND	Module Ground.	1
8	ModSelL	Module Select.	
9	ResetL	Module Reset.	
10	VccRx	+3.3V Receiver Power Supply.	2
11	SCL	2-Wire Serial Interface Clock.	
12	SDA	2-Wire Serial Interface Data.	
13	GND	Module Ground.	1
14	Rx3+	Receiver Non-Inverted Data Output.	
15	Rx3-	Receiver Inverted Data Output.	
16	GND	Module Ground.	1
17	Rx1+	Receiver Non-Inverted Data Output.	
18	Rx1-	Receiver Inverted Data Output.	
19	GND	Module Ground.	1
20	GND	Module Ground.	1
21	Rx2-	Receiver Inverted Data Output.	
22	Rx2+	Receiver Non-Inverted Data Output.	
23	GND	Module Ground.	1
24	Rx4-	Receiver Inverted Data Output.	
25	Rx4+	Receiver Non-Inverted Data Output.	
26	GND	Module Ground.	1
27	ModPrsL	Module Present.	
28	IntL/RxLOSL	Interrupt. Optionally configurable as RxLOSL via the management interface (SFF-8636).	
29	VccTx	+3.3V Transmitter Power Supply.	2
30	Vcc1	+3.3V Power Supply.	2
31	LPMoDe/TxDis	Low-Power Mode. Optionally configurable as TxDis via the management Interface (SFF-8636).	
32	GND	Module Ground.	1
33	Tx3+	Transmitter Non-Inverted Data Input.	
34	Tx3-	Transmitter Inverted Data Input.	
35	GND	Module Ground.	1

36	Tx1+	Transmitter Non-Inverted Data Input.	
37	Tx1-	Transmitter Inverted Data Input.	
38	GND	Module Ground.	1


**Notes:**

1. GND is the symbol for signal and supply (power) common for the QSFP28 module. All are common within the module, and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal common ground plane.
2. VccRx, Vcc1, and VccTx are the receiving and transmission power suppliers and shall be applied concurrently. Recommended host board power supply filtering is shown below. VccRx, Vcc1, and VccTx may be internally connected within the module in any combination. The connector pins are each rated for a maximum current of 1000mA.

**Electrical Pin-Out Details**

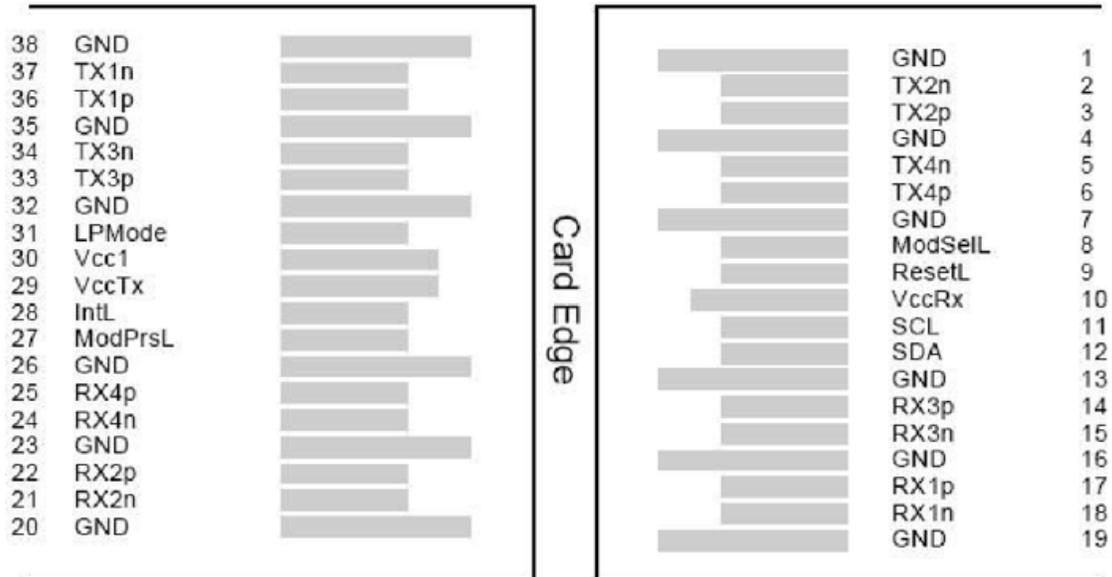

# Mechanical Specifications

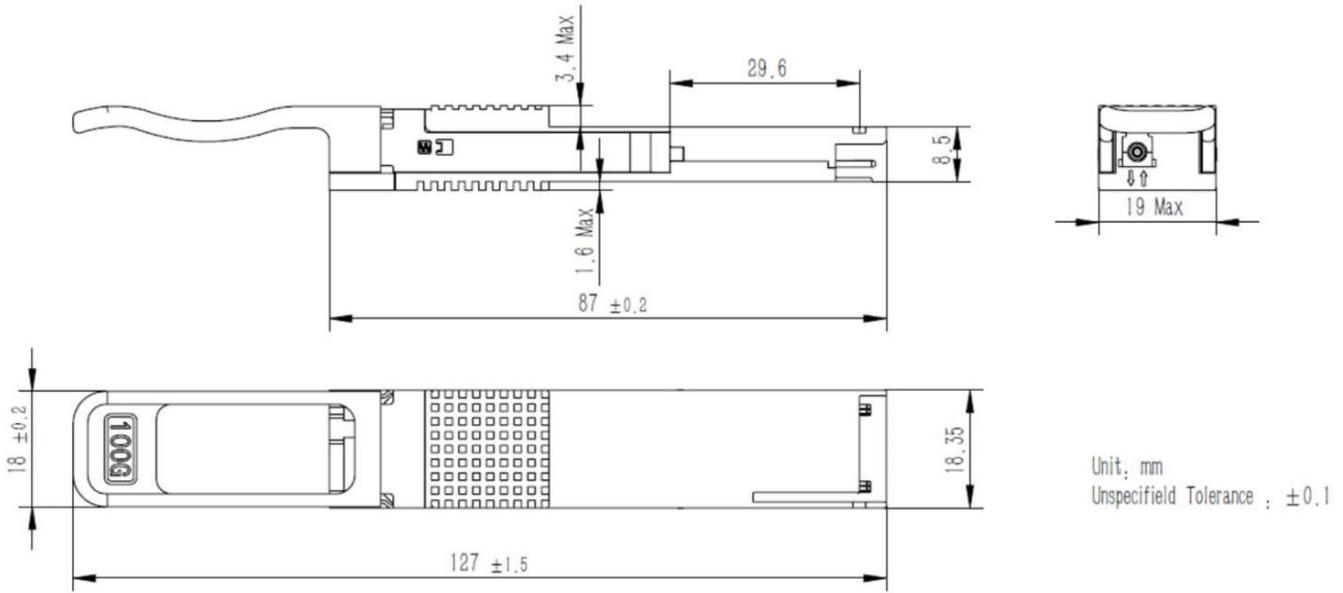

Unit: mm  
Unspecifield Tolerance :  $\pm 0.1$

# About Skylane Optics

Skylane is a leading provider of transceivers for optical communication.

We offer an extensive portfolio for the enterprise, access, datacenter and metropolitan fiber optical market as well as for smart home applications and home networks.

We cover the European, South American and North American market with a strong partner network and have offices in Belgium, Brazil, Sweden and USA.

Our offerings are characterized by high quality and performance. In combination with our strong technical support, we enable our customers to build cost optimized network solutions.

We offer an extensive range of high-quality products including transceivers (Optical and copper), Active Optical Cable (AOC), Direct Attach Cable (DAC), Mux/Demux, Coding Box.

